

# JBL Stage XD Series Loudspeakers

Indoor/Outdoor All Weather Loudspeakers

JBL



## Product Overview

Stage XD speakers are designed to be extremely durable and waterproof while delivering the highest level of audio. Elements including acoustic lens tweeters, and patented High-Definition Imaging (HDI™) waveguides have been incorporated into the design to ensure that the sound is clear and accurate. The speakers are available in 2 sizes featuring 5.25" (130mm) or 6.5" (165mm) Polycellulose cone woofer and available in black or white.

## Highlights

- IP67 Waterproof rating provides protection from the harshest of outdoor conditions
- Aluminum Dome Tweeters with Acoustic Lens for smooth on and off axis frequency response
- High-Definition Imaging (HDI™) waveguides with optimized geometry for smooth dispersion and low distortion
- Included swivel ball mount allows for easy installation and angle adjustment
- Extremely Durable repairable cabinet is the first with IP67 waterproof certification
- Zero bezel magnetically attached grilles
- Rotatable logo for horizontal and vertical applications

Magnetically Attached Grille



Rotatable Logo for Horizontal and Vertical Applications



Compact IP67 waterproof cabinet

1" (25mm) Aluminum dome tweeter with Acoustic Lens mated to High-Definition Imaging (HDI™) horns

5.25" (130mm) or 6.5" (165mm) poly woofer

Included Versatile Post Ball Mount




# Specifications

	Stage XD-5	Stage XD-6
High Frequency Transducer	1" (25mm) Aluminum dome with High-Definition Imaging (HDI™) waveguide	1" (25mm) Aluminum dome with High-Definition Imaging (HDI™) waveguide
Low Frequency Transducer	5.25" (130mm) Polycellulose cone woofer	6.5" (165mm) Polycellulose cone woofer
Nominal Impedance	4ohms	4ohms
Sensitivity (2.83V@1m)	86dB	88dB
Recommended Amplifier Power	20-100W RMS	20-100W RMS
Frequency Response (-6dB On-Axis)	75Hz-25kHz	55Hz-25kHz
Crossover Frequency	2500K	2500K
Operating Temperature	32° F (0° C) to 113° F (45° C)	32° F (0° C) to 113° F (45° C)
Dimensions	H: 6.4 (162mm) W: 7.2 (182mm) D: 6.4 (162mm)	H: 8.7 (222mm) W: 11.8 (299mm) D: 7.6 (194mm)
Wall Mount Length	2.8 (71mm)	2.8 (71mm)

# Dimensions

Stage XD-5

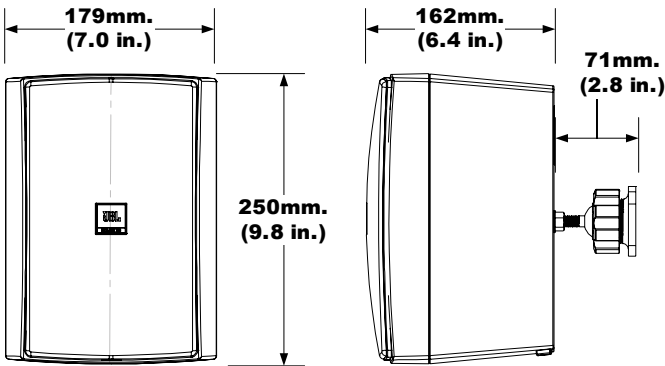

Stage XD-6

